

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
13 December 2001 (13.12.2001)

PCT

(10) International Publication Number  
**WO 01/94461 A1**

(51) International Patent Classification<sup>7</sup>: **C08K 5/40**,  
3/36, C08L 21/00

(74) Agent: **REITENBACH, Daniel**; Uniroyal Chemical  
Company, Inc., 199 Benson Road, Middlebury, CT 06749  
(US).

(21) International Application Number: PCT/US01/16155

(22) International Filing Date: 17 May 2001 (17.05.2001)

(81) Designated States (*national*): BR, CA, CN, CZ, ID, IN,  
JP, KR, MX, SK.

(25) Filing Language: English

(26) Publication Language: English

(84) Designated States (*regional*): European patent (AT, BE,  
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,  
NL, PT, SE, TR).

(30) Priority Data:  
09/590,320 8 June 2000 (08.06.2000) US

**Published:**

- with international search report
- before the expiration of the time limit for amending the  
claims and to be republished in the event of receipt of  
amendments

(71) Applicant: **UNIROYAL CHEMICAL COMPANY,  
INC.** [US/US]; 199 Benson Road, Middlebury, CT 06749  
(US).

*For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.*

(72) Inventors: **HANNON, Martin, J.**; 69 Lebanon Road,  
Bethany, CT 06524 (US). **HONG, Sung, Whee**; 250  
Scenic Court Ext., Cheshire, CT 06410 (US). **CORNELL,  
Robert, J.**; 38 Heritage Drive, Prospect, CT 06712 (US).



**WO 01/94461 A1**

(54) Title: RUBBER COMPOSITIONS AND METHOD FOR INCREASING THE MOONEY SCORCH VALUE

(57) Abstract: A rubber composition is disclosed wherein the rubber composition contains at least (a) a rubber component; (b) a silica filler; and, (c) at least one thiuram disulfide accelerator, it being provided that diphenyl guanidine is substantially absent in the rubber composition. The compositions may also include suitable amounts of other ingredients such as carbon black, coupling agents, antiozonants, antioxidants, etc.

RUBBER COMPOSITIONS AND METHOD FOR  
INCREASING THE MOONEY SCORCH VALUE

BACKGROUND OF THE INVENTION

This invention relates generally to rubber compositions and a method for increasing the Mooney Scorch value of a rubber composition. More particularly, the rubber composition described herein contains at least (a) a rubber component; (b) a silica  
5 filler; and, (c) at least one thiuram disulfide accelerator which increases the silica associated properties. The rubber compositions are particularly useful for tire tread applications in vehicles, e.g., passenger automobiles and trucks.

The tire treads of modern tires must meet performance standards which require a broad range of desirable properties. Thus, rubber compositions suitable for,  
10 e.g., tire treads, should exhibit not only desirable strength and elongation, particularly at high temperatures, but also good cracking resistance, good abrasion resistance, desirable skid resistance and low tan delta values at low frequencies for desirable rolling resistance. Additionally, a high complex dynamic modulus is necessary for maneuverability and steering control.

15 Major tire manufacturers have developed tire tread compounds which provide lower rolling resistance for improved fuel economy and better skid/traction for a safer ride. Three types of performance are important in tread compounds. They include good wear resistance, good traction and low rolling resistance.

Presently, silica has been added to rubber compositions as a filler to replace some or substantially all of the carbon black filler to improve these properties, e.g., lower rolling resistance. Although more costly than carbon black, the advantages of silica include, for example, improved wet traction, low rolling resistance, etc., with  
5 reduced fuel consumption. Problems associated with the use of silica include processing difficulties and reduced wear. The wear reduction is believed to be associated with the less uniform silica dispersion properties and decreased reinforcement characteristics of silica as compared with carbon black.

The difficulties in dispersing silica are believed to be associated with the  
10 polar nature of silica and non-polar nature of rubber. Regardless, the silica has been found to form localized clumps or aggregations in the rubber which detract from both tire wear and fuel consumption. As compared with carbon black, silica does not react as strongly with the rubber and thereby tends to give less strength to the rubber.

It is known to use coupling agents to enhance the rubber reinforcement  
15 characteristics of silica. A coupling agent is a bi-functional molecule that will react with the silica at one end thereof and cross-link with the rubber at the other end thereof. In this manner, the reinforcement and strength of the rubber are improved, e.g. the toughness, strength, modulus, tensile and abrasion resistance are particularly improved. The coupling agent is believed to cover the surface of the silica particle which then

hinders the silica from agglomerating with other silica particles. By interfering with the agglomeration process, the dispersion is improved and therefore the wear and fuel consumption are improved.

5 The use of silica in relatively large proportions for improving various tire properties has been found to undesirably slow the cure rate of the rubber. This has led to the use of secondary accelerators such as diphenyl guanidine (DPG) in amounts which increase the cure rate. These accelerators are typically used in combination with other accelerators such as sulfenamides.

10 However, the use of these secondary accelerators, and particularly DPG, typically result in the rubber composition possessing a lower Mooney scorch value during its manufacture thereby resulting in decreased processing time. Problems associated with a decreased processing time include, for example, precured compounds and rough surfaces on extruded parts. Additionally, diphenyl guanidine is typically employed in high amounts which result in the rubber compositions being more expensive to  
15 manufacture since more material must be used.

#### SUMMARY OF THE INVENTION

In accordance with the present invention a rubber composition is provided which comprises (a) a rubber component; (b) a silica filler; and, (c) at least one thiuram  
20 disulfide accelerator, it being provided that diphenyl guanidine is substantially absent in the rubber composition.

By employing a thiuram disulfide in place of diphenyl guanidine in a rubber composition, the rubber compositions disclosed herein advantageously possess a higher Mooney Scorch value relative to a rubber composition containing diphenyl guanidine. This allows for a longer processing time of the rubber which, in turn, provides for further manufacturing of the rubber. Additionally, significantly lower amounts of the thiuram disulfides can be employed in the rubber compositions described herein relative to the amounts of which diphenyl guanidine has been used in rubber compositions thereby providing an economical advantage by using less materials.

#### 10      DESCRIPTION OF THE PREFERRED EMBODIMENTS

The rubber compositions of this invention contains at least (a) a rubber component; (b) a silica filler; and, (c) at least one thiuram disulfide accelerator, it being provided that diphenyl guanidine is substantially absent in the rubber composition.

The rubber components for use herein are based on highly unsaturated rubbers such as, for example, natural or synthetic rubbers. Representative of the highly unsaturated polymers that can be employed in the practice of this invention are diene rubbers. Such rubbers will ordinarily possess an iodine number of between about 100 to about 250, although highly unsaturated rubbers having a higher or a lower (e.g., of 50-100) iodine number can also be employed. Illustrative of the diene rubbers that can be utilized are polymers based on conjugated dienes such as, for example, 1,3-butadiene; 2-methyl-1,3-butadiene; 1,3-pentadiene; 2,3-dimethyl-1,3-butadiene; and the like, as well

as copolymers of such conjugated dienes with monomers such as, for example, styrene, alpha-methylstyrene, acetylene, e.g., vinyl acetylene, acrylonitrile, methacrylonitrile, methyl acrylate, ethyl acrylate, methyl methacrylate, ethyl methacrylate, vinyl acetate, and the like. Preferred highly unsaturated rubbers include natural rubber, cis-  
5 polyisoprene, polybutadiene, poly(styrene-butadiene), styrene-isoprene copolymers, isoprene-butadiene copolymers, styrene-isoprene-butadiene tripolymers, polychloroprene, chloro-isobutene-isoprene, nitrile-chloroprene, styrene-chloroprene, and poly (acrylonitrile-butadiene). Moreover, mixtures of two or more highly unsaturated rubbers with elastomers having lesser unsaturation such as EPDM, EPR, butyl or halogenated  
10 butyl rubbers are also within the contemplation of the invention.

Suitable silica fillers include silica, precipitated silica, amorphous silica, vitreous silica, fumed silica, fused silica, synthetic silicates such as aluminum silicates, alkaline earth metal silicates such as magnesium silicate, calcium silicate and the like with BET surfaces of 20 to 400 m<sup>2</sup>/g and primary particle diameters of 10 to 400 nm,  
15 natural silicates such as kaolin and other naturally occurring silicas and the like. Also useful are highly dispersed silicas prepared, for example, by precipitation of solutions of silicates or by flame hydrolysis of silicon halides with specific surfaces of 5 to 1000 m<sup>2</sup>/g and preferably 20 to 400 m<sup>2</sup>/g (BET surface) with primary particle sizes of 100 to 400 nm. The silicas can also be present in the form of mixed oxides with other metal oxides  
20 such as Al, Mg, Ca, Ba, Zn, Zr, Ti oxides and the like. Silicas are commercially available from such sources as Cabot Corporation under the Cab-O-Sil® tradename; PPG Industries

under the Hi-Sil and Ceptane tradenames; Rhodia under the Zeosil tradename and Degussa AG under the Ultrasil and Coupsil tradenames. Mixtures of two or more silica fillers can be used in preparing the rubber composition of this invention. A preferred silica for use herein is Zeosil 1165MP manufactured by Rhodia.

5:                   Generally, the silica filler is incorporated into the rubber composition in an amount ranging from about 10 to about 100 parts per hundred parts of rubber (phr), preferably from about 15 to about 85 parts per hundred parts of rubber and more preferably from about 40 to about 80 parts per hundred parts of rubber.

                  It is advantageous to employ carbon black fillers with the silica filler in  
10   forming the rubber compositions of this invention. Suitable carbon black fillers include any of the commonly available, commercially-produced carbon blacks known to one skilled in the art. Those having a surface area (EMSA) of at least 20 m<sup>2</sup>/g and more preferably at least 35 m<sup>2</sup>/g. up to 200 m<sup>2</sup>/g or higher are preferred. Surface area values used in this application are those determined by ASTM test D-3765 using the  
15   cetyltrimethyl-ammonium bromide (CTAB) technique. Among the useful carbon blacks are furnace black, channel blacks and lamp blacks. More specifically, examples of the carbon blacks include super abrasion furnace (SAF) blacks, high abrasion furnace (HAF) blacks, fast extrusion furnace (FEF) blacks, fine furnace (FF) blacks, intermediate super abrasion furnace (ISAF) blacks, semi-reinforcing furnace (SRF) blacks, medium  
20   processing channel blacks, hard processing channel blacks and conducting channel blacks. Other carbon blacks which may be utilized include acetylene blacks. Mixtures of

two or more of the above blacks can be used in preparing the rubber compositions of the invention. Typical values for surface areas of usable carbon blacks are summarized in the following Table I.

TABLE I


Carbon Blacks

	ASTM Designation (D-1765-82a)	Surface Area (m <sup>2</sup> /g) (D-3765)
5		
10	N-110	126
	N-220	111
	N-339	95
	N-330	83
	N-550	42
15	N-660	35

The carbon blacks utilized in the invention may be in pelletized form or an unpelletized flocculant mass. Preferably, for ease of handling, pelletized carbon black is preferred. The carbon blacks are ordinarily incorporated into the rubber composition in amounts ranging from about 20 to about 200 parts per hundred parts of rubber and preferably from about 40 to about 80 parts per hundred parts of rubber.



The thiuram disulfides for use in the rubber composition of this invention as an accelerator advantageously provide a rubber composition possessing a greater Mooney Scorch value than that of a similar rubber composition in which a significant amount up to the entire amount of the thiuram disulfide has been replaced with diphenyl guanidine as an accelerator. Suitable thiuram disulfides can be any available thiuram disulfide known to one skilled in the art. Representative of the thiuram disulfides are those of the general formula

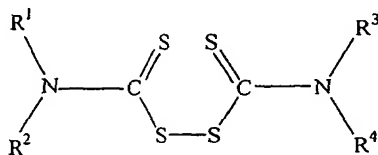

wherein R<sup>1</sup>, R<sup>2</sup>, R<sup>3</sup> and R<sup>4</sup> each are the same or different and are hydrogen or hydrocarbon of up to about 30 carbon atoms, optionally containing one or more heterocyclic groups, or R<sup>1</sup> and R<sup>2</sup> and/or R<sup>3</sup> and R<sup>4</sup> together with the nitrogen atom to which they are bonded are joined together to form a heterocyclic group, optionally containing one or more additional heterocyclic atoms. Specific thiuram disulfides include those in which R<sup>1</sup>, R<sup>2</sup>, R<sup>3</sup> and R<sup>4</sup> are independently selected to be methyl, ethyl, propyl, isopropyl, butyl, isobutyl, pentyl, hexyl, cyclohexyl, heptyl, octyl, 2-ethylhexyl, nonyl, decyl, undecyl, dodecyl, stearyl, oleyl, phenyl, benzyl, tridecyl, tetradecyl, pentadecyl, hexadecyl, heptadecyl, octadecyl, nonadecyl, eicosanyl, and the like, containing, e.g., up to about 30 carbon atoms, preferably no more than about 24 carbon atoms and more preferably no more than about

18 carbon atoms. It is particularly advantageous to employ a thiuram disulfide wherein  $R^1$ ,  $R^2$ ,  $R^3$  and  $R^4$  each possess between 8 to 18 carbon atoms. A particularly preferred thiuram disulfide for use herein is wherein  $R^1$ ,  $R^2$ ,  $R^3$  and  $R^4$  each possess between 12 and 14 carbon atoms.

5                   Generally, the thiuram disulfide is present in the rubber composition of this invention in an amount ranging from about 0.05 to about 20 parts per hundred parts of rubber, preferably from about 0.1 to about 5 parts per hundred parts of rubber and more preferably from about 0.15 to about 2 parts per hundred parts of rubber.

                  A coupling agent can be incorporated into the rubber composition of the  
10   present invention. Suitable coupling agents include any coupling agent which has conventionally been compounded together with a silica filler in a rubber composition. Examples of such a coupling agent are vinyltrichlorosilane, vinyltrimethoxysilane, vinyltriethoxysilane, vinyltris( $\beta$ -methoxyethoxy) silane,  $\beta$ -(3,4-epoxycyclohexyl)ethyltrimethoxysilane,  $\gamma$ -glycidoxypropyltrimethoxysilane,  $\gamma$ -  
15   glycidoxypropylmethyldiethoxysilane,  $\gamma$ -glycidoxypropyltriethoxysilane,  $\gamma$ -methacryloxypropylmethyldimethoxysilane,  $\gamma$ -methacryloxypropyltrimethoxysilane,  $\gamma$ -methacryloxypropylmethyldiethoxysilane,  $\gamma$ -methacryloxypropyltriethoxysilane, N- $\beta$ (aminoethyl)- $\gamma$ -aminopropylmethyldimethoxysilane, N- $\beta$ (aminoethyl)- $\gamma$ -aminopropyltrimethoxysilane, N- $\beta$ (aminoethyl)- $\gamma$ -aminopropyltriethoxysilane,  $\gamma$ -aminopropyltrimethoxysilane,  $\gamma$ -aminopropyltriethoxysilane, N-phenyl- $\gamma$ -aminopropyltrimethoxysilane,  $\gamma$ -chloropropyltrimethoxysilane,  $\gamma$ -  
20   aminopropyltrimethoxysilane,  $\gamma$ -chloropropyltrimethoxysilane,  $\gamma$ -

mercaptopropyltrimethoxysilane, bis-(3-[triethoxysilyl]propyl)tetrasulfane and the like; bis-[3-(triethoxysilyl)propyl]tetrasulfide; 3-trimethoxysilylpropyl-N,N-dimethylthiocarbamoyltetrasulfide; trimethoxysilylpropyl-mercaptopbenz-thiazoltetrasulfide; triethoxysilylpropyl-methacrylate monosulfide; 5 dimethoxymethylsilylpropyl-N,N-dimethyl-thiocarbamoyltetrasulfide; dithiodipropionic acid and the like and mixtures. The coupling agent is ordinarily employed in amounts ranging from about 0.5 to about 20 parts per hundred parts of rubber and preferably from about 3 to about 15 parts per hundred parts of rubber.

The rubber compositions of this invention are particularly useful when 10 manufactured into articles such as, for example, tires, motor mounts, rubber bushings, power belts, printing rolls, rubber shoe heels and soles, rubber floor tiles, caster wheels, elastomer seals and gaskets, conveyor belt covers, hard rubber battery cases, automobile floor mats, mud flap for trucks, ball mill liners, windshield wiper blades and the like. Preferably, the rubber compositions of this invention are advantageously used in a tire as 15 a component of any or all of the thermosetting rubber-containing portions of the tire. These include the tread, sidewall, and carcass portions of, for example, a truck tire, passenger tire, off-road vehicle tire, high speed tire, motorcycle tire and the like that also contain many different reinforcing layers therein.

The rubber composition of this invention can be formulated in any 20 conventional manner. In addition to the rubber component, silica filler, thiuram disulfide accelerator, and coupling agent, at least one other common additive can be added to the rubber compositions of this invention, if desired or necessary, in a suitable amount.

Suitable common additives for use herein include vulcanizing agents, activators, retarders, antioxidants, plasticizing oils and softeners, fillers other than silica and carbon black, reinforcing pigments, antiozonants, waxes, tackifier resins, and the like and combinations thereof.

5

### EXAMPLES

The following Examples are intended to further illustrate the present invention and are not intended to limit the scope of the invention in any manner.

#### EXAMPLES 1-4 AND COMPARATIVE EXAMPLE A

10

Employing the ingredients indicated in Tables II and III (which are listed in parts per hundred of rubber by weight), several rubber compositions were compounded in the following manner: the ingredients indicated in Table II were added to an internal mixer and mixed until the materials are incorporated and thoroughly dispersed and discharged from the mixer. Discharge temperatures of about 160°C are typical. The batch is cooled, and is reintroduced into the mixer along with the ingredients indicated in Table III. The second pass is shorter and discharge temperatures generally run between 93-105°C.

15

TABLE II - PHASE I

<u>Example or Comparative Example</u>		<u>1</u>	<u>2</u>	<u>3</u>	<u>4</u>	<u>A</u>
5	Solflex 1216 <sup>1</sup>	75.00	75.00	75.00	75.00	75.00
	Budene 1207 <sup>2</sup>	25.00	25.00	25.00	25.00	25.00
	N234 <sup>3</sup>	32.00	32.00	32.00	32.00	32.00
	Zeosil 1165 <sup>4</sup>	44.00	44.00	44.00	44.00	44.00
	Si69 <sup>5</sup>	3.52	3.52	3.52	3.52	3.52
10	Sundex 8125 <sup>6</sup>	32.50	32.50	32.50	32.50	32.50
	Stearic Acid	1.00	1.00	1.00	1.00	1.00
	Flexzone 7P <sup>7</sup>	2.00	2.00	2.00	2.00	2.00
	<u>Sunproof IMP Improved<sup>8</sup></u>	<u>1.50</u>	<u>1.50</u>	<u>1.50</u>	<u>1.50</u>	<u>1.50</u>
MB-1:Total		216.52	216.52	216.52	216.52	216.52
15	(1) Solution styrene-butadiene rubber low bound styrene and medium vinyl content available from Goodyear.					
	(2) Polybutadiene rubber available from Goodyear.					
	(3) High surface area carbon black available from Cabot Corp.					
	(4) Highly dispersable silica available from Rhodia.					
20	(5) Silane coupling agent bis-(3-[triethoxysilyl]propyl)tetrasulfane available from Degussa.					
	(6) Aromatic oil available from Sun Oil.					
	(7) Paraphenylene diamine available from Uniroyal Chemical Company.					
	(8) Blend of hydrocarbon waxes available from Uniroyal Chemical Company.					

TABLE III-PHASE II

<u>Example or Comparative Example</u>		<u>1</u>	<u>2</u>	<u>3</u>	<u>4</u>	<u>A</u>
5	MB-1 <sup>9</sup>	216.52	216.52	216.52	216.52	216.52
	Zinc Oxide	2.50	2.50	2.50	2.50	2.50
	Delac NS <sup>10</sup>	1.50	1.50	1.50	1.50	1.50
	Sulfur 21-10 <sup>11</sup>	2.00	2.00	2.00	2.00	2.00
	Diphenyl guanidine	0.00	0.00	0.00	0.00	1.00
10	Benzyl Tuex <sup>12</sup>	0.00	0.00	0.15	0.25	0.00
	<u>Royalac 150<sup>13</sup></u>	<u>1.03</u>	<u>0.25</u>	<u>0.00</u>	<u>0.00</u>	<u>0.00</u>
	Total	223.55	222.77	222.67	222.77	223.52

(9) MB-1 is the batch provided as set forth in Table II.

15 (10) N-*t*-butyl-2-benzothiazole sulfenamide available from Uniroyal Chemical Company.

(11) Sulfur available from C.P. Hall.

(12) Tetrabenzyl thiuram disulfide available from Uniroyal Chemical Company.

(13) Tetraalkyl (C<sub>12</sub>-C<sub>14</sub>) thiuram disulfide available from Uniroyal Chemical Company.

### Results

20 The compounded stocks prepared above were then sheeted out and cut for cure. The samples were cured for the times and at the temperatures indicated in Table IV and their physical properties evaluated. The results are summarized in Table IV below.

Note that in Table IV, cure characteristics were determined using a Monsanto rheometer ODR 2000 (1° ARC, 100 cpm): MH is the maximum torque and ML is the minimum

25 torque. Scorch safety (t<sub>s2</sub>) is the time to 2 units above minimum torque (ML), cure time (t<sub>50</sub>) is the time to 50% of delta torque above minimum and cure time (t<sub>90</sub>) is the time to 90% of delta torque above minimum. Tensile Strength, Elongation and Modulus were

measured following procedures in ASTM D-412. Examples 1-4 illustrate a rubber composition within the scope of this invention. Comparative Example A represents a rubber composition outside the scope of this invention.

5

CURED PHYSICAL PROPERTIES  
TABLE IV

<u>Example or Comparative Example</u>		<u>1</u>	<u>2</u>	<u>3</u>	<u>4</u>	<u>A</u>
<u>Cured Characteristics obtained at 160°C</u>						
10	ML (lb-in.)	5.48	5.74	5.68	5.69	4.96
	MH (lb-in.)	30.38	29.34	31.37	32.27	28.24
	Scorch safety $t_{52}$ (min)	2.84	3.29	3.12	2.89	2.62
	Cure time $t_{50}$ (min)	4.53	6.26	5.92	5.10	4.81
	Cure time $t_{90}$ (min)	6.83	12.49	11.34	8.60	13.78
15	<u>Cured at 160°C</u>					
	Cure time @ 160°C (min)	13.0	18.0	15.0	13.0	18.0
	100% Modulus (Mpa)	3.6	2.9	2.9	3.4	2.8
	300% Modulus (Mpa)	13.8	10.9	11.1	13.1	10.3
20	Tensile Strength (Mpa)	19.3	20.9	22.4	20.9	19.7
	Elongation, % at Break	400.0	500.0	530.0	450.0	500.0
	Hardness, Shore A	65.0	65.0	65.0	66.0	66.0

TABLE IV - CONT'D

<u>Example or Comparative Example</u>		<u>1</u>	<u>2</u>	<u>3</u>	<u>4</u>	<u>A</u>
<u>Monsanto Fatigue to Failure</u>						
	Unaged (kilocycles to failure)	189.1	357.1	265.1	361.8	381.3
5	Aged 2 weeks at 70°C (kilocycles to failure)	89.9	226.8	69.4	132.3	135.9
<u>Mooney Scorch (MS at 135°C)</u>						
	3 Pt. Rise Time (min)	12	13	13	12	10
10	<u>Tangent Delta 60°C (10Hz) [RPA-2000]</u>					
	<u>% Strain</u>					
	0.7	0.108	0.115	0.105	0.112	0.117
	1.0	0.127	0.134	0.132	0.132	0.132
	2.0	0.171	0.178	0.174	0.172	0.179
15	5.0	0.197	0.215	0.205	0.210	0.213
	7.0	0.200	0.217	0.212	0.211	0.208
	14.0	0.206	0.223	0.224	0.217	0.217

It can be seen from the above data that the examples containing a thiuram disulfide (Examples 1-4) provide superior performance when compared to the example containing diphenyl guanidine (Comparative Example A). The Mooney Scorch value for Example 1 was significantly higher than that of Comparative Example A.

The Mooney Scorch value for Example 2 was also significantly higher compared to that of Comparative Example A. The 100% and 300% Modulus and % elongation for Example 2 are comparable to those of Example A. Thus, by replacing 1



phr of diphenyl guanidine with 0.25 phr of tetraalkyl( $C_{12}$ - $C_{14}$ ) thiuram disulfide, the scorch safety of the rubber composition has been significantly improved without any sacrifice in physical properties resulting in an economical cost advantage being realized.

5        Examples 3 and 4 also provided a Mooney Scorch value that was also significantly higher compared to that of Comparative Example A. The 100% and 300% Modulus and % elongation for Examples 3 and 4 are comparable to those of Example A. Thus, by replacing 1 phr of diphenyl guanidine with small amounts of tetrabenzyl thiuram disulfide, the scorch safety of the rubber composition has been significantly improved without any sacrifice in physical properties resulting in an economical cost  
10       advantage being realized.

WHAT IS CLAIMED IS:

1. A rubber composition comprising (a) a rubber component; (b) a silica filler; and, (c) at least one thiuram disulfide accelerator, it being provided that diphenyl guanidine is substantially absent in the rubber composition.

5

2. The rubber composition of Claim 1 wherein the rubber component is selected from the group consisting of natural rubber, homopolymers of conjugated diolefins, copolymers of conjugated diolefins and ethylenically unsaturated monomers and mixtures thereof.

10

3. The rubber composition of Claim 1 wherein the rubber component is selected from the group consisting of natural rubber, cis-polyisoprene, polybutadiene, poly(styrene-butadiene), styrene-isoprene copolymers, isoprene-butadiene copolymers, styrene-isoprene-butadiene tripolymers, polychloroprene, chloro-isobutene-isoprene, nitrile-chloroprene, styrene-chloroprene, and poly (acrylonitrile-butadiene).

15

4. The rubber composition of Claim 1 wherein the silica filler is selected from the group consisting of silica, precipitated silica, amorphous silica, vitreous silica, fumed silica, fused silica, synthetic silicate, alkaline earth metal silicate, highly dispersed silicate and mixtures thereof.


20

5. The rubber composition of Claim 1 wherein the silica filler is present in an amount from about 10 to about 100 parts per hundred parts of rubber (phr).

6. The rubber composition of Claim 1 further comprising a carbon black filler.

7. The rubber composition of Claim 6 wherein the carbon black filler is present in an amount from about 20 to about 200 phr.

8. The rubber composition of Claim 1 wherein the thiuram disulfide is of the general formula

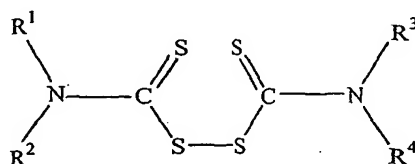

wherein R<sup>1</sup>, R<sup>2</sup>, R<sup>3</sup> and R<sup>4</sup> each are the same or different and are hydrogen or hydrocarbon of up to about 30 carbon atoms, optionally containing one or more heterocyclic groups, or R<sup>1</sup> and R<sup>2</sup> and/or R<sup>3</sup> and R<sup>4</sup> together with the nitrogen atom to which they are bonded are joined together to form a heterocyclic group, optionally containing one or more heterocyclic atoms.

9. The rubber composition of Claim 8 wherein R<sup>1</sup>, R<sup>2</sup>, R<sup>3</sup> and R<sup>4</sup> each are hydrocarbons of between 8 and 18 carbon atoms.

10. The rubber composition of Claim 8 wherein R<sup>1</sup>, R<sup>2</sup>, R<sup>3</sup> and R<sup>4</sup> each are hydrocarbons of between 12 and 14 carbon atoms.

11. The rubber composition of Claim 1 wherein the thiuram disulfide is  
5 present in an amount of from about 0.05 to about 20 phr.

12. The rubber composition of Claim 1 further comprising a coupling agent selected from the group consisting of vinyltrichlorosilane, vinyltrimethoxysilane, vinyltriethoxysilane, vinyltris(β-methoxyethoxy) silane, β-(3,4-  
10 epoxycyclohexyl)ethyltrimethoxysilane, γ-glycidoxypropyltrimethoxysilane, γ-glycidoxypropylmethyldiethoxysilane, γ-glycidoxypropyltriethoxysilane, γ-methacryloxypropylmethyldimethoxysilane, γ-methacryloxypropyltrimethoxysilane, γ-methacryloxypropylmethyldiethoxysilane, γ-methacryloxypropyltriethoxysilane, N-β(aminoethyl)-γ-aminopropylmethyldimethoxysilane, N-β(aminoethyl)γ-  
15 aminopropyltrimethoxysilane, N-β(aminoethyl)γ-aminopropyltriethoxysilane, γ-aminopropyltrimethoxysilane, γ-aminopropyltriethoxysilane, N-phenyl-γ-aminopropyltrimethoxysilane, γ-chloropropyltrimethoxysilane, γ-mercaptopropyltrimethoxysilane, bis-(3-[triethoxysilyl]propyl)tetrasulfane, bis-[3-(triethoxysilyl)propyl]tetrasulfide; 3-trimethoxysilylpropyl-N,N-  
20 dimethylthiocarbamoyltetrasulfide; trimethoxysilylpropyl-mercaptopbenz-thiazoltetrasulfide; triethoxysilylpropyl-methacrylate monosulfide;

dimethoxymethylsilylpropyl-N,N-dimethyl-thiocarbamoyltetrasulfide; dithiodipropionic acid and mixtures thereof.

13. The rubber composition of Claim 1 which is a tire tread, motor  
5 mount, rubber bushing, power belt, printing roll, rubber shoe heel and sole, rubber floor tile, caster wheel, elastomer seal and gasket, conveyor belt cover, hard rubber battery case, automobile floor mat, truck mud flap, ball mill liner or windshield wiper blade.

14. The rubber composition of Claim 1 further comprising at least one  
10 other additive selected from the group consisting of vulcanizing agents, activators, retarders, antioxidants, plasticizing oils, and softeners, reinforcing pigments, antiozonants, waxes, tackifier resins and combinations thereof.

15. The rubber composition of Claim 1 wherein the Mooney Scorch value  
15 of the rubber composition is greater than that of a similar rubber composition in which a significant amount up to the entire amount of the thiuram disulfide accelerator is replaced with diphenyl guanidine accelerator.

16. A method for increasing the Mooney Scorch value of a rubber composition which comprises the steps of forming a rubber composition comprising (a) a rubber component; (b) a silica filler; and, (c) at least one thiuram disulfide, it being provided that diphenyl guanidine is substantially absent in the rubber composition.

5

17. The method of Claim 16 wherein the rubber component is selected from the group consisting of natural rubber, homopolymers of conjugated diolefins, copolymers of conjugated diolefins and ethylenically unsaturated monomers and mixtures thereof.


10

18. The method of Claim 16 wherein the silica filler is selected from the group consisting of silica, precipitated silica, amorphous silica, vitreous silica, fumed silica, fused silica, synthetic silicate, alkaline earth metal silicate, highly dispersed silicate and mixtures thereof.

15

19. The method of Claim 16 wherein the silica filler is present in an amount from about 10 to about 100 phr.

20. The method of Claim 16 wherein the thiuram disulfide is of the general formula



wherein  $R^1$ ,  $R^2$ ,  $R^3$  and  $R^4$  each are the same or different and are hydrogen or hydrocarbon of up to about 30 carbon atoms, optionally containing one or more heterocyclic groups, or  $R^1$  and  $R^2$  and/or  $R^3$  and  $R^4$  together with the nitrogen atom to which they are bonded are joined together to form a heterocyclic group, optionally containing one or more heterocyclic atoms.

21. The method of Claim 20 wherein  $R^1$ ,  $R^2$ ,  $R^3$  and  $R^4$  of the thiuram disulfide each are hydrocarbons of between 8 and 18 carbon atoms.

22. The method of Claim 20 wherein  $R^1$ ,  $R^2$ ,  $R^3$  and  $R^4$  of the thiuram disulfide each are hydrocarbons of between 12 and 14 carbon atoms.

23. The method of Claim 22 wherein the thiuram disulfide is present in an amount from about 0.05 to about 20 phr.

24. The method of Claim 16 wherein the rubber composition further comprises a coupling agent selected from the group consisting of vinyltrichlorosilane, vinyltrimethoxysilane, vinyltriethoxysilane, vinyltris( $\beta$ -methoxyethoxy) silane,  $\beta$ -(3,4-epoxycyclohexyl)ethyltrimethoxysilane,  $\gamma$ -glycidoxypropyltrimethoxysilane,  $\gamma$ -glycidoxypropylmethyldiethoxysilane,  $\gamma$ -glycidoxypropyltriethoxysilane,  $\gamma$ -methacryloxypropylmethyldimethoxysilane,  $\gamma$ -methacryloxypropyltrimethoxysilane,  $\gamma$ -methacryloxypropylmethyldiethoxysilane,  $\gamma$ -methacryloxypropyltriethoxysilane, N- $\beta$ (aminoethyl)- $\gamma$ -aminopropylmethyldimethoxysilane, N- $\beta$ (aminoethyl) $\gamma$ -aminopropyltrimethoxysilane, N- $\beta$ (aminoethyl) $\gamma$ -aminopropyltriethoxysilane, N-phenyl- $\gamma$ -aminopropyltrimethoxysilane,  $\gamma$ -chloropropyltrimethoxysilane,  $\gamma$ -mercaptopropyltrimethoxysilane, bis-(3-[triethoxysilyl]-propyl)-tetrasulfane, bis-[3-(triethoxysilyl)-propyl] tetrasulfide; 3-trimethoxysilylpropyl-N,N-dimethylthiocarbamoyltetrasulfide; trimethoxysilylpropyl-mercaptobenz-thiazoltetrasulfide; triethoxysilylpropyl-methacrylate monosulfide; dimethoxymethylsilylpropyl-N,N-dimethyl-thiocarbamoyltetrasulfide; dithiodipropionic acid and mixtures thereof.



## INTERNATIONAL SEARCH REPORT

Int. Application No  
PCT/US 01/16155

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 C08K5/40 C08K3/36 C08L21/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C08K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 857 751 A (CONTINENTAL AG) 12 August 1998 (1998-08-12) abstract; claims; table page 2, line 36 - line 43 page 3, line 15 - line 20 page 5, line 3 - line 7	1-8, 11-20, 24
X	US 3 706 819 A (USAMOTO TERUYOSHI ET AL) 19 December 1972 (1972-12-19) abstract; claims; example 1 column 4, line 30 - line 44	1-11, 13-23
X	EP 0 479 526 A (BRIDGESTONE CORP) 8 April 1992 (1992-04-08) abstract; claims; tables page 3, line 8 - line 19	1-9, 11, 13-21



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*Z\* document member of the same patent family

Date of the actual completion of the international search

4 October 2001

Date of mailing of the international search report

15/10/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Mettler, R-M

# INTERNATIONAL SEARCH REPORT

Information on patent family members

In International Application No  
PCT/US 01/16155

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0857751	A	12-08-1998	DE 19704464 A1	13-08-1998
			EP 0857751 A1	12-08-1998
			US 5905107 A	18-05-1999
US 3706819	A	19-12-1972	AT 316858 B	15-06-1974
			BE 756166 A1	15-03-1971
			CA 937694 A1	27-11-1973
			CA 973543 A2	26-08-1975
			CH 544122 A	15-11-1973
			DE 2045574 A1	25-03-1971
			DK 140948 B	10-12-1979
			DK 656474 A	02-06-1975
			ES 383693 A1	01-03-1973
			FR 2061737 A5	25-06-1971
			GB 1325064 A	01-08-1973
			GB 1328480 A	30-08-1973
			NL 7013592 A ,B,	18-03-1971
			SE 375316 B	14-04-1975
			ZA 7006103 A	27-05-1971
EP 0479526	A	08-04-1992	JP 4145144 A	19-05-1992
			JP 6089181 B	09-11-1994
			DE 69111357 D1	24-08-1995
			DE 69111357 T2	01-02-1996
			EP 0479526 A1	08-04-1992
			ES 2077176 T3	16-11-1995